



SAWCUT ASPH. EDGES STRAIGHT AND TRUE APPROX. 2" DEEP IMMEDIATELY PRIOR TO PATCHING. JAGGED SAWCUTS SHALL NOT BE ACCEPTABLE. STRAIGHT UNIFORM WIDTHS PARALLEL TO THE EDGE OF PAVT OR CURB ARE REQUIRED. THE FINAL PRODUCT SHALL BE SUBJECT TO THE ENGINEERS APPROVAL.

MAXIMUM "PAYMENT" WIDTH (INFORMATION IS FOR USE ON ANNEXATION PROJECTS ONLY):
 10' MAX. SANITARY SEWER MAIN (10' OR LESS)
 12' MAX. SANITARY SEWER MAIN (OVER 10' IN DEPTH)
 6' MAX. SANITARY SEWER LATERAL 4' MAX. WATER MAIN AND LATERAL (WIDTHS GREATER THAN MAX. WILL NOT BE PAID)

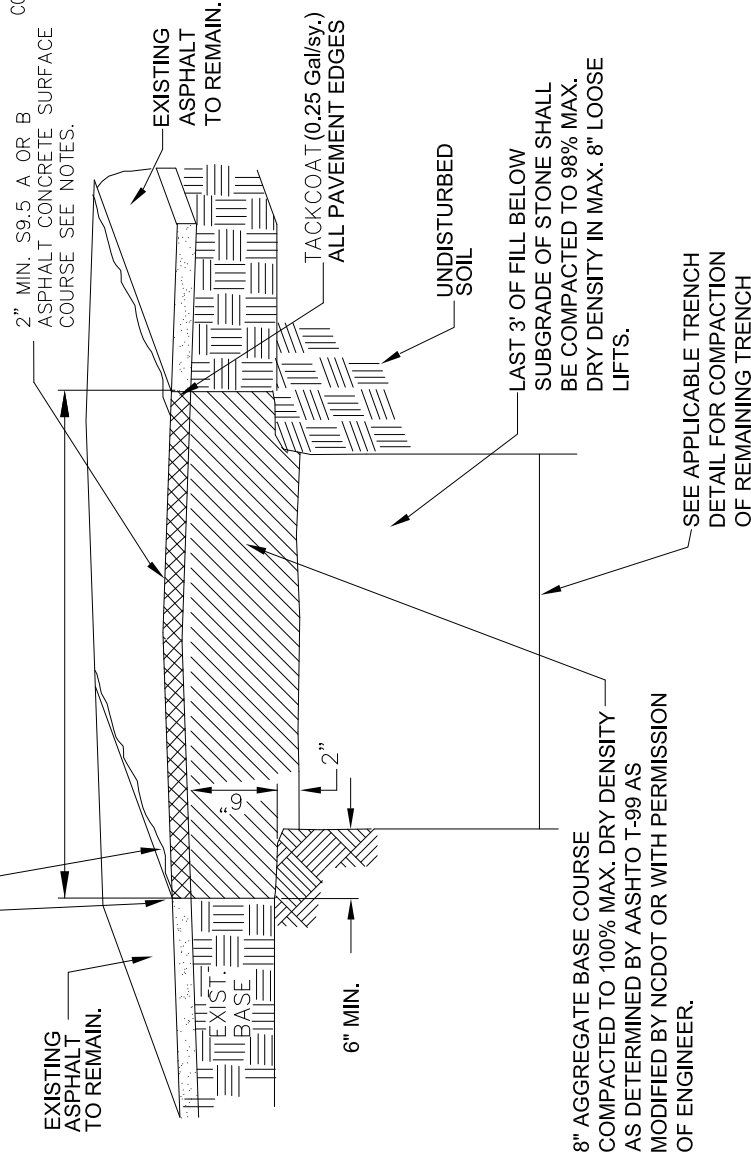

NOTES:
 1. 2"-4" THICKNESS SF9.5 A OR B
 2. 4"-6" THICKNESS I-19 AT 4"

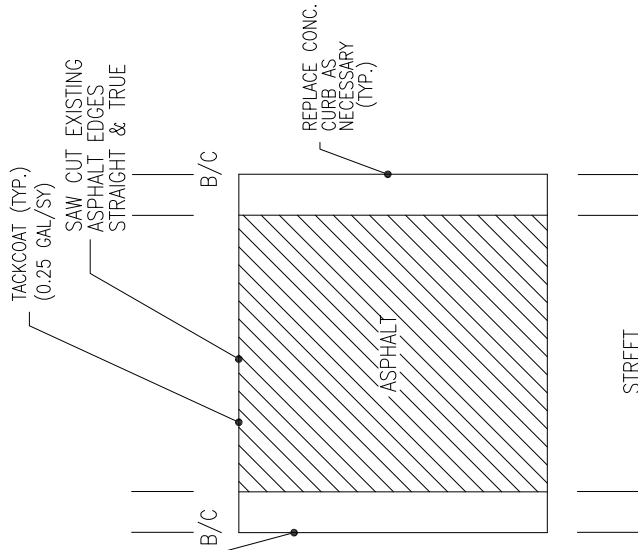


TYPICAL PERMANENT SAWCUT AND PAVEMENT PATCH

STREET DESIGN

Detail ST-11a

DETAIL NOT TO SCALE

PAGE 2 OF 3



Town of Hope Mills, North Carolina

February 28, 2015 Original